

# MU50H Series

50W, Wide 4:1 Input Range, 1.5KV Isolation, DIP2"x1" Package DC/DC Converters

## Features

- ▶ Rated power: 50W Max.
- ▶ Input voltage range 4:1
- ▶ Regulated output with  $\pm 10\%$  trimming range
- ▶ High efficiency up to 91%
- ▶ Isolation voltage 1.5KVDC
- ▶ Remote On/Off control
- ▶ Operating temperature range -40 ~ +85°C ambient
- ▶ RoHS compliant
- ▶ Standard 2"x1" package
- ▶ Six-sided metal shielding package
- ▶ Over voltage, over current, and short circuit protection
- ▶ Meet UL/EN/IEC 62368-1
- ▶ 3 year warranty



## Overview

The MU50H series are 1.5KV isolated 50Watt DC/DC converters with standard DIP2"x1" footprint. Designed with high efficiency, they operate in a wide temperature range from -40°C to +85°C. Other features include wide 4:1 input voltage range, remote on/off control, over voltage, over current, and short circuit protections. These converters are ideally suitable for industrial control system, measurement equipment, telecom, wireless network.

## Model Numbers

Model Number	Input Voltage [VDC]			V <sub>OUT</sub> [VDC]	Output Current [mA]		Efficiency [%] Typ.	Capacitive Load [ $\mu$ F] Max.
	Nom.	Range	*Max.		Max.	Min.		
MU50H-2405	24	9~36	40	5	10000	0	88	10000
MU50H-2412	24	9~36	40	12	4167	0	90	2700
MU50H-2415	24	9~36	40	15	3333	0	91	1680
MU50H-2424	24	9~36	40	24	2087	0	91	680
MU50H-4805	48	18~75	80	5	10000	0	88	10000
MU50H-4812	48	18~75	80	12	4167	0	90	2700
MU50H-4815	48	18~75	80	15	3333	0	91	1680
MU50H-4824	48	18~75	80	24	2087	0	91	680

\* Input voltage exceed the Max. value may cause permanent damage.

\* Only typical models are listed. Other models may be available upon request.

# MU50H Series

50W, Wide 4:1 Input Range, 1.5KV Isolation, DIP2"X1" Package DC/DC Converters

## Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^{\circ}\text{C}$ , nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
<b>Input current</b> Full load	$V_{IN, Nom}=24\text{V}$ $V_{IN, Nom}=48\text{V}$	-	2289 1144	-	mA	
<b>Input current</b> No load	$V_{OUT}=5\text{V}$ Others	-	60 12	-	mA	
<b>Reflected ripple current</b>		-	30		mA	
<b>Input voltage surge</b> 1 second max	$V_{IN, Nom}=24\text{V}$ $V_{IN, Nom}=48\text{V}$	-0.7 -0.7	-	50 100	VDC	
<b>Startup input voltage</b>	$V_{IN, Nom}=24\text{V}$ $V_{IN, Nom}=48\text{V}$	-	-	9 18	VDC	
<b>Startup time</b>	Resistive load	-	10	-	mS	
<b>Remote On/Off control</b> "Ctrl" pin open or logic high [ON] "Ctrl" pin grounded or logic low [OFF]	Logic high Logic low Ctrl pin current	3.5 0 -	- - 5	12 1.2 10	VDC VDC mA	Positive Logic
<b>Output voltage accuracy</b>	$I_{OUT}=5\%$ to 100% $I_{OUT}=0\%$ to 100%	-	$\pm 1$ $\pm 1$	$\pm 3$ $\pm 5$	%	
<b>Line regulation</b> Full load, $V_{IN}=V_{IN, Min}$ to $V_{IN, Max}$		-	$\pm 0.2$	$\pm 0.5$	%	
<b>Load regulation</b> $I_{OUT}=5\%$ to 100% of $I_{OUT, rated}$		-	$\pm 0.5$	$\pm 1.0$	%	
<b>Output ripple and noise</b> 20MHz bandwidth, peak to peak		-	75	150	mVp-p	
<b>Temperature coefficient</b>	Full load	-	-	0.03	%/ $^{\circ}\text{C}$	
<b>Dynamic load response</b> $I_{OUT}=25\%\sim 50\%\sim 75\%$ of $I_{OUT, rated}$	Peak deviation** Peak deviation Recovery time	-	$\pm 5$ $\pm 3$ 250	$\pm 8$ $\pm 5$ 500	% $V_{OUT}$ % $V_{OUT}$ $\mu\text{S}$	** $V_{OUT}=5\text{V}$
<b>Output voltage trim</b>	Trim range	-	$\pm 10$	-	% $V_{OUT}$	
<b>Output over voltage protection</b>		110	-	-	% $V_{OUT}$	
<b>Output over current protection</b>		110	-	-	% $I_{OUT}$	
<b>Output short circuit protection</b>		Continuous, automatic recovery				
<b>Input filter</b>		PI filter				
<b>Hot plug</b>		None				

\* Operating with less than 5% of rated load will not cause damage to the converters, but the performances data may not fall into the specifications, and stable operating is not assured.

# MU50H Series

50W, Wide 4:1 Input Range, 1.5KV Isolation, DIP2"X1" Package DC/DC Converters

## General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
<b>Isolation voltage</b> 1 minute, leakage current 1mA max.	I/P to O/P	1500	-	-	VDC	
<b>Isolation resistance</b> Tested at 500VDC	I/P to O/P	1000	-	-	M ohm	
<b>Isolation capacitance</b> 100KHz, 0.1V	I/P to O/P	-	2000	-	pF	
<b>Switching frequency*</b>	Full load	-	300	-	KHz	PWM mode
<b>Operating temperature</b>	See "Derating Curve"	-40	-	+85	°C	
<b>Storage temperature</b>		-55	-	+125	°C	
<b>Storage humidity</b>	None condensing	5	-	95	%RH	
<b>Pin soldering resistance</b> 1.5mm away from case for 10 sec		-	-	300	°C	
<b>Case material</b>		Aluminum alloy				
<b>Cooling method</b>		Free air convection				
<b>Vibration</b>		10-150Hz, 5G, 0.75mm along X, Y and Z				
<b>MTBF</b>	MIL-HDBK-217F	>1,000,000 Hours, T <sub>A</sub> =25°C				
<b>Design based on standards</b>		UL/EN/IEC 62368-1				
<b>Safety certifications</b>		EN/IEC 62368-1				
<b>EMC</b>		CISPR32, EN55032 Class B with external circuit IEC/EN61000-4-2, 3, 4, 5, 6				
<b>Size, and Weight</b>		50.8 x 25.4 x 12 mm, 40g				

\* Switching frequency is measured at full load. The converter reduces the switching frequency at low load [less than 50% load] for better efficiency.

# MU50H Series


50W, Wide 4:1 Input Range, 1.5KV Isolation, DIP2"X1" Package DC/DC Converters

## Characteristic Curves

### Derating Curve

#### Output vs Ambient Temperature


All models, with no heatsink

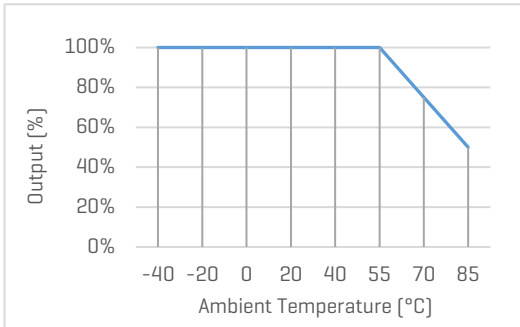

### Efficiency Curve


#### Efficiency vs Input Voltage

MU50H-2424, with full Load

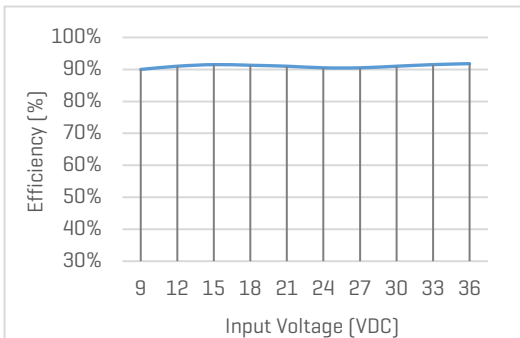

#### Efficiency vs Load

MU50H-2424, with nominal input voltage

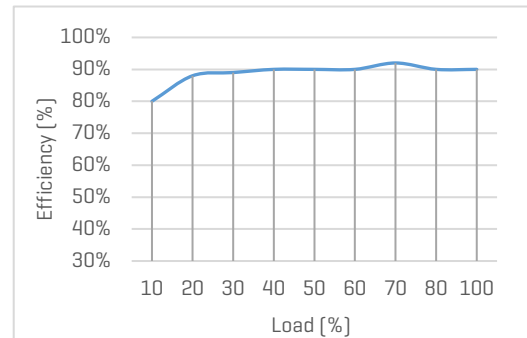

## Recommended Application Circuit

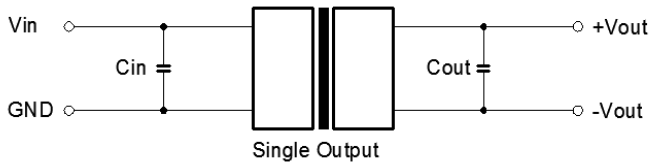


Figure 1. Typical external circuit

### Note

\*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

\*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

[Table 1] Recommended component spec

Input voltage	24V	48V
C <sub>IN</sub>	100uF, 50V	100uF, 100V

[Table 2] Recommended component spec

Output voltage	5 ... 24V
C <sub>OUT</sub>	100uF, 50V

## Circuit for EMC Enhancement

\*Use this application circuit to meet Class B EMC performance.

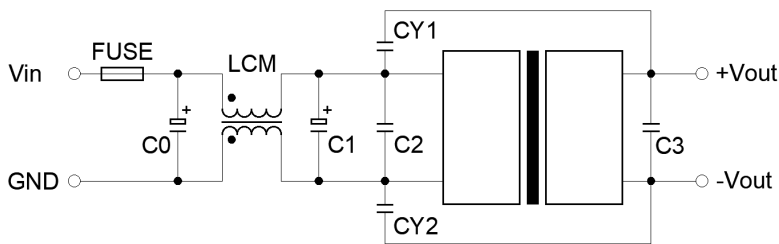


Figure 2. Circuit for EMC enhancement


[Table 3] Recommended component spec

Component	LCM	C0	C1	C2	CY1, CY2
V <sub>IN, Nom</sub> =24V	1mH	680uF, 50V	330uF, 50V	4.7uF, 50V	1nF, 2KV
V <sub>IN, Nom</sub> =48V	1mH	330uF, 100V	330uF, 100V	2.2uF, 100V	1nF, 2KV

\* "Fuse" to be selected according to application needs. "C3" refer to relative "C<sub>OUT</sub>" values in Table 2.

## Circuits for Output Trim

\* Components within the red block are internal components of the converter.

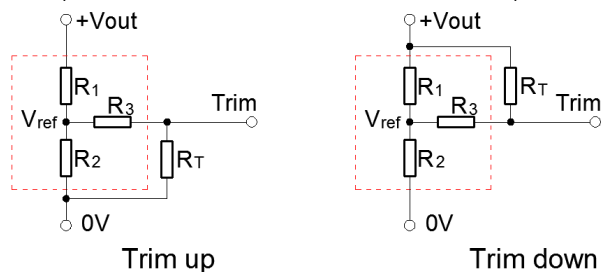

### Internal Component Spec

V <sub>OUT</sub> [V]	R1 [K Ohm]	R2 [K Ohm]	R3 [K Ohm]	V <sub>ref</sub> [V]
5	2.4	2.34	13.62	2.5
12	8.2	2.15	17.35	2.5
15	12	2.39	21.02	2.5
24	10	1.16	10.71	2.5

\* The formulas to calculate the desired resistance of Trim resistor "R<sub>T</sub>".



$$\text{Trim up: } R_T = \frac{a R_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_{OUT} - V_{ref}} R_1$$

$$\text{Trim down: } R_T = \frac{a R_1}{R_1 - a} - R_3 \quad a = \frac{V_{OUT} - V_{ref}}{V_{ref}} R_2$$

# MU50H Series

50W, Wide 4:1 Input Range, 1.5KV Isolation, DIP2"X1" Package DC/DC Converters

## Mechanical Specifications

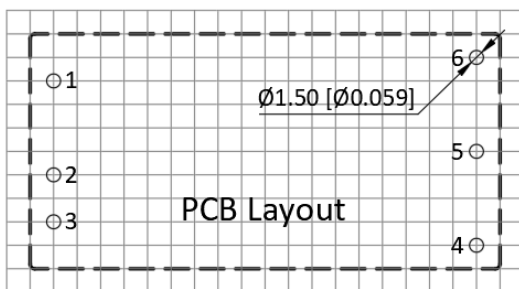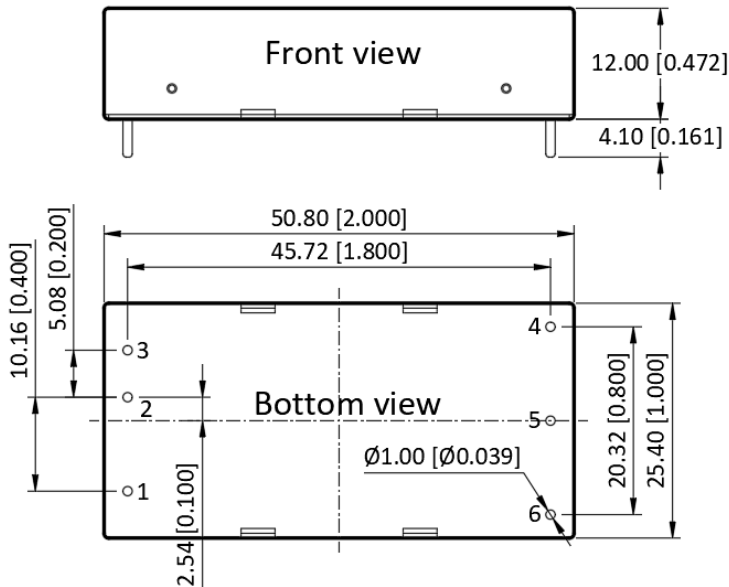

### Pin Definition

Pin #	Single Out
1	Ctrl
2	GND
3	V <sub>IN</sub>
4	+V <sub>OUT</sub>
5	OV
6	Trim

\* Unless otherwise specified unit: mm [inch]

\* General tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

\* Pin thickness:  $\pm 0.10$  [ $\pm 0.004$ ]

\* Footprint grid 2.54 x 2.54 mm

### FAVOTEK LIMITED

#17 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong  
 Tel: +852 8191 6662  
 Eml: info@favotek.com

Favotek reserves the right to make changes to the product at any time without notice. Information provided by Favotek is believed to be accurate and reliable. However, no responsibility is assumed by Favotek for its use, nor for any infringements of patents or other rights of third parties which may result from its use.