





## 2410, RoHS Compliant & Pb-Free SMD NANO FUSE (FAST-BLOW) 方型超微表面贴片式保险丝 (速断型)


### INTERRUPTING CAPACITY / 分断能力:

50A at 250V AC (100mA-10A), 50A at 125V AC/DC (12A-15A)  
100A at 125V AC/DC (100mA-10A), 100A at 65V DC (12A-15A)

### Dimensions/ 尺寸



### Land Pattern:



Unit 单位: mm

### TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证		
		UR/cUR		
		H	L1	L2
25F -0100H/L1	100mA	●	●	
25F -0125H/L1	125mA	●	●	
25F -0160H/L1	160mA	●	●	
25F -0200H/L1	200mA	●	●	
25F -0250H/L1	250mA	●	●	
25F -0315H/L1	315mA	●	●	
25F -0375H/L1	375mA	●	●	
25F -0400H/L1	400mA	●	●	
25F -0500H/L1	500mA	●	●	
25F -0630H/L1	630mA	●	●	
25F -0750H/L1	750mA	●	●	
25F -0800H/L1	800mA	●	●	
25F -010H/L1	1A	●	●	
25F -013H/L1	1.25A	●	●	
25F -015H/L1	1.5A	●	●	
25F -016H/L1	1.6A	●	●	
25F -020H/L1	2A	●	●	
25F -025H/L1	2.5A	●	●	
25F -030H/L1	3A	●	●	
25F -032H/L1	3.15A	●	●	
25F -035H/L1	3.5A	●	●	
25F -040H/L1	4A	●	●	
25F -050H/L1	5A	●	●	
25F -063H/L1	6.3A	●	●	
25F -070H/L1	7A	●	●	
25F -080H/L1	8A	●	●	
25F -100H/L1	10A	●	●	
25F -120L1/L2	12A		●	●
25F -150L1/L2	15A		●	●

● DENOTES FOR APPROVED ● 表示已取得安全认证

H DENOTES FOR 250V L1 DENOTES FOR 125V L2 DENOTES FOR 65V

### ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min. 最快4小时	(100mA-15A)
200%	5 seconds Max. 最慢5秒	(100mA-10A)
	20 seconds Max. 最慢20秒	(12A-15A)

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C ±5°C, 30s ±5s


Solderability/ 可焊性: MIL-STD-202, Method 208

### PACKING/ 包装:

1,000 PIECES TAPED AND REELED IN ONE BOX

每卷 1,000 只保险丝, 装入一个包装盒

### BOX SIZE/ 包装盒尺寸:

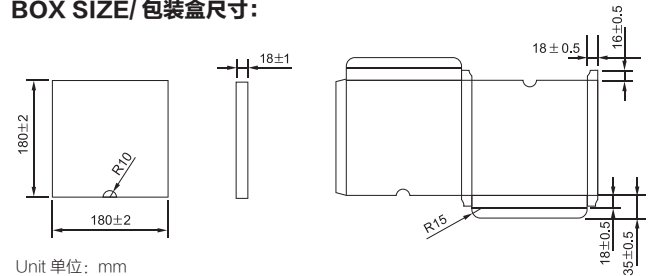

Unit 单位: mm

### 25F AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

### 25F 平均 I-T 曲线图 (仅供参考)

