




客户确认签名:

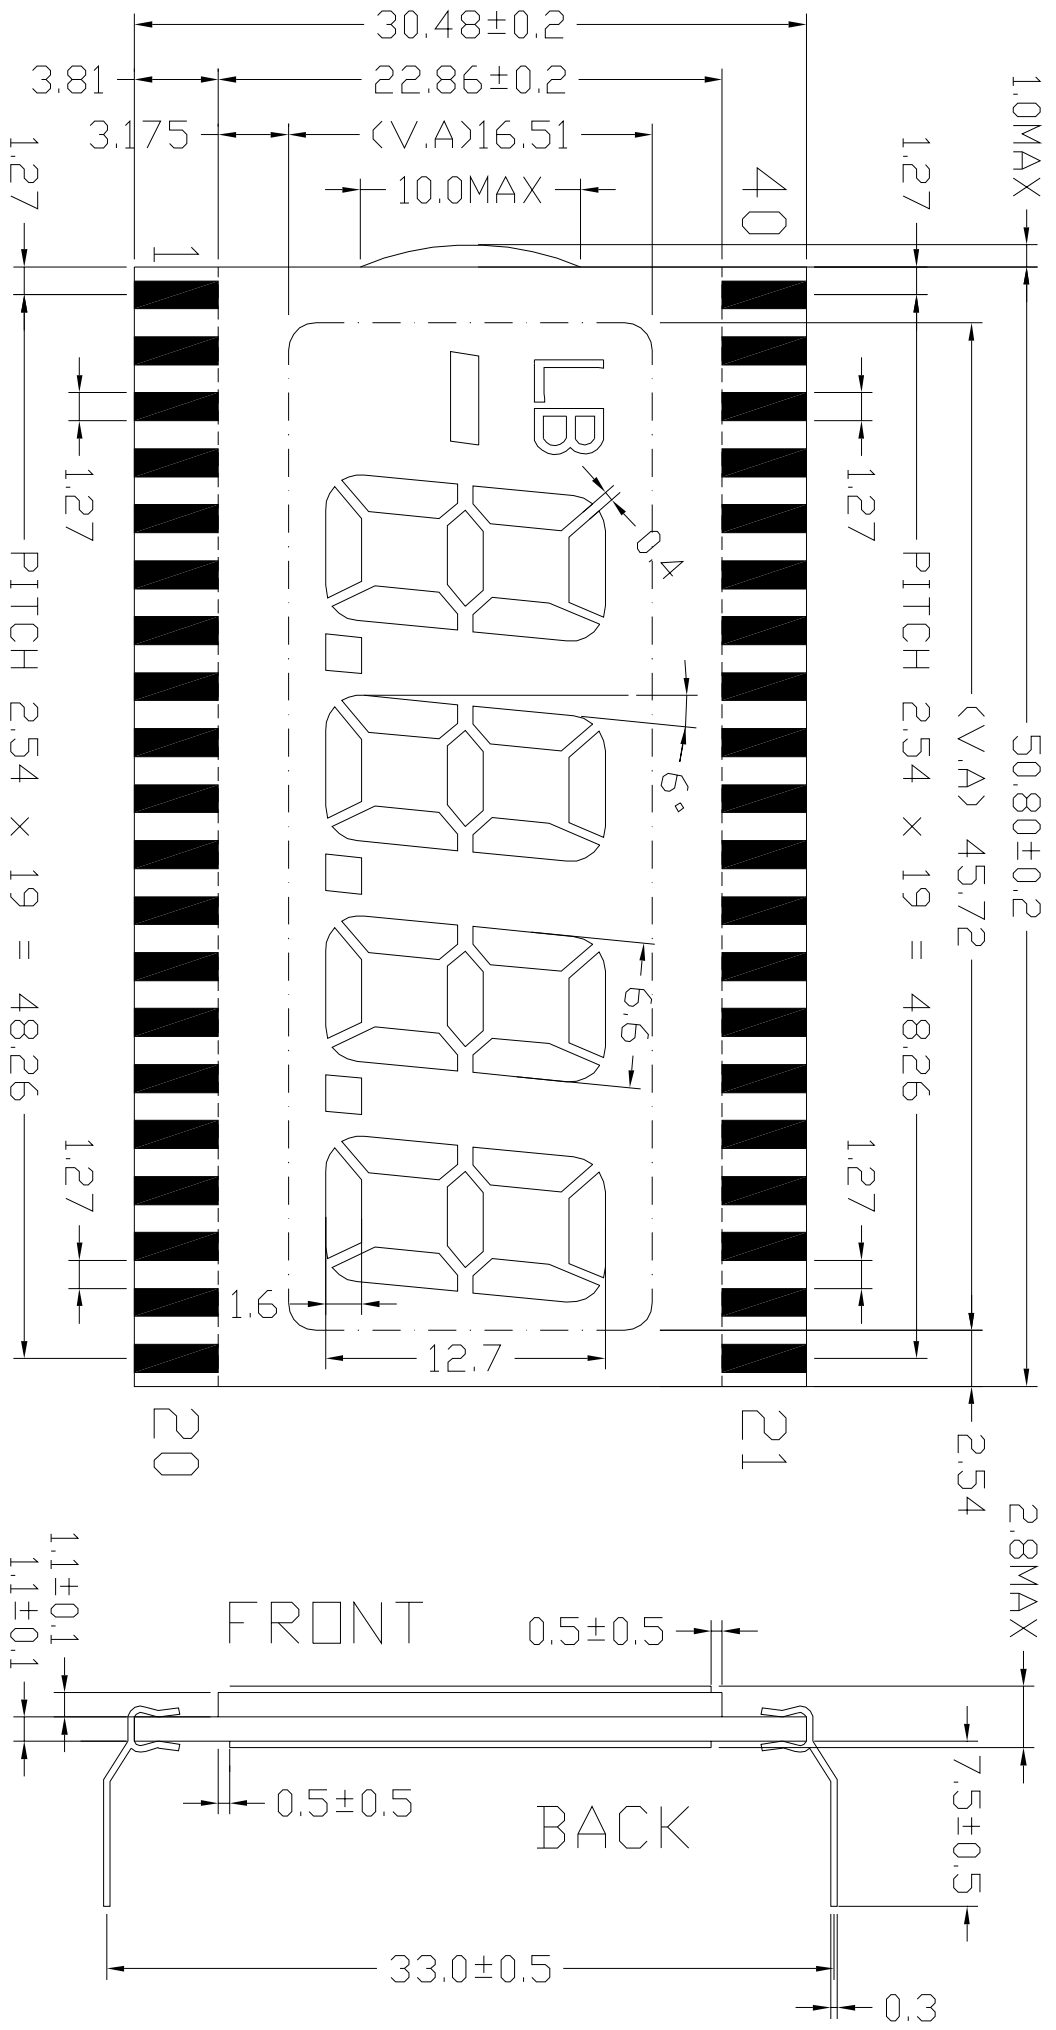

DISPLAY TYPE	TN & POSITIVE	DRIVE METHOD	STATIC	设计:	Xu	单位: mm	型号	ADT8491	页数	第1页 (共2页)
FRONT POLARIZER	TRANSMISSIVE	OPERATING TEMP	-10° C TO +60° C	审核:		Zhang	版本: 1	客户编号	EDS805	日期
BACK POLARIZER	REFLECTIVE	STORAGE TEMP	-20° C TO +70° C			EMAIL: ande@intech-1cd.com.cn				
VIEWING DIRECTION	6:00	CONNECTOR	Metal pins			安得显示器(深圳)有限公司		电话: (0755)28057112		
OPERATING VOLTAGE	5.0V	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2				LCD GROUP INTECH DISPLAY (SHENZHEN) CO., LTD		传真: (0755)28057129		

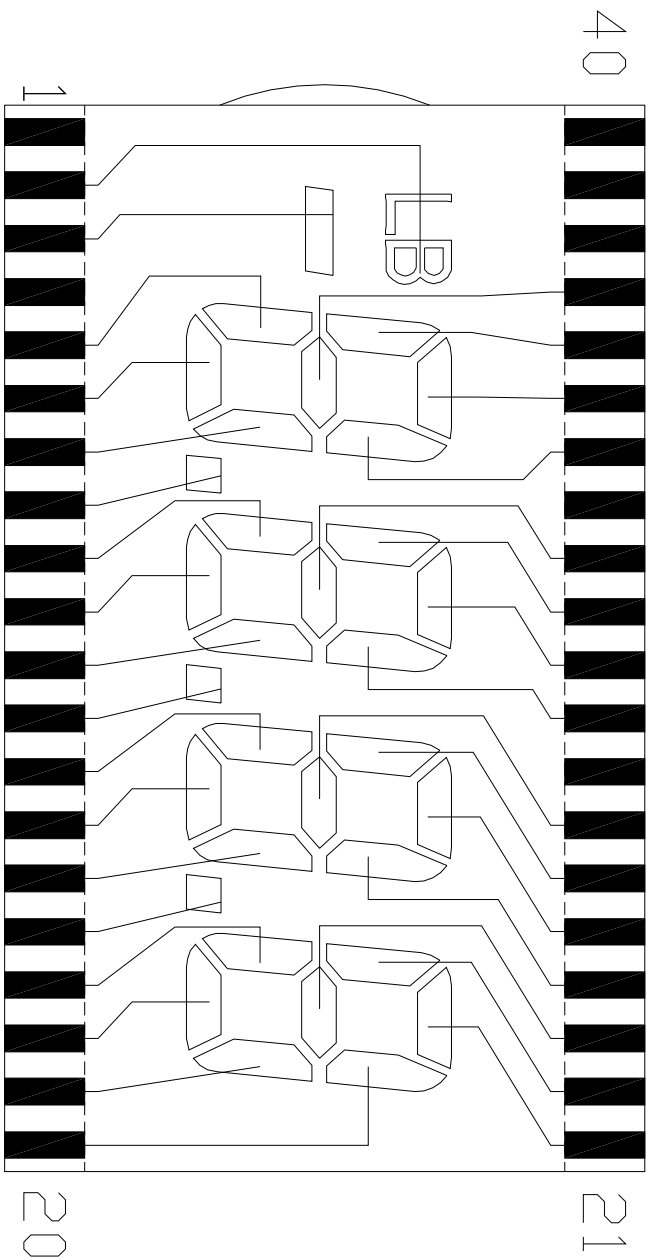

# SEGMENTS

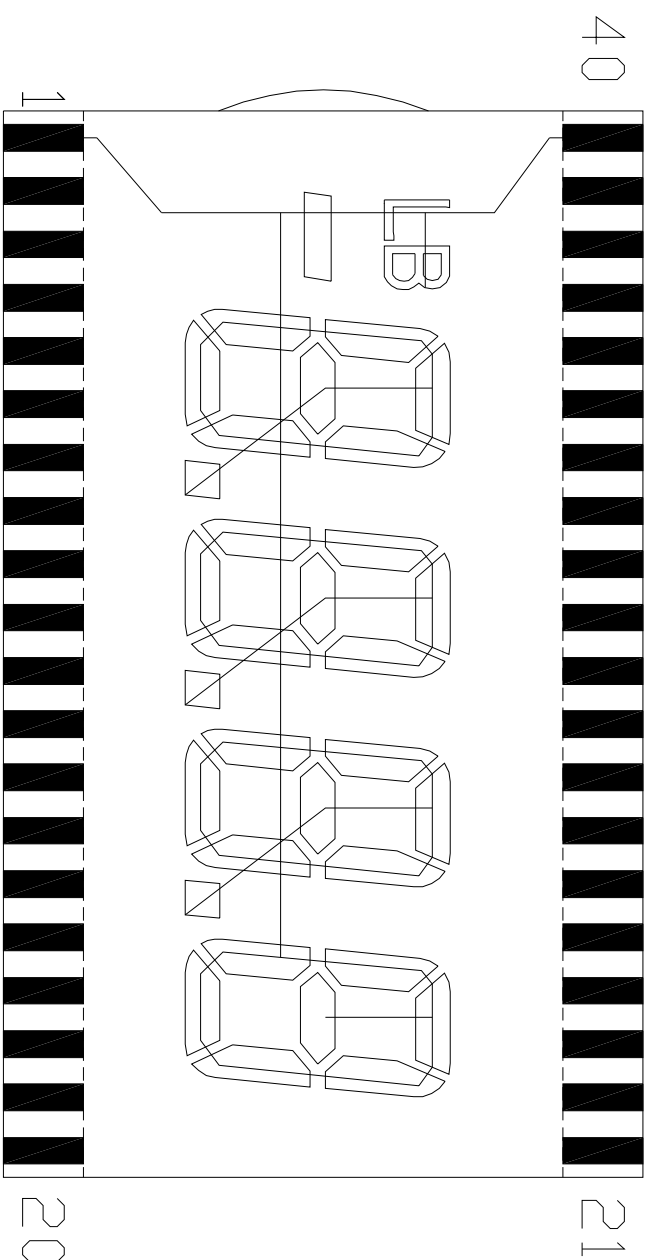

# COMMONS

单位: mm	型号	ADT8491	页数	第2页 (共2页)
版本: 1	客户编号	EDS805	日期	2006-02-04
<b>EMAIL: ande@intech-1cd.com.cn</b>				
 <b>安德显示器(深圳)有限公司</b>		电话: (0755) 28057112 传真: (0755) 28057129		
<b>LED GROUP INTECH DISPLAY (SHENZHEN) CO., LTD</b>				