



1
RoHS Compliance

2		3		4		5		6		7		8	
REV	SYM	Revision Record				Appr.	Date						
V0	KLS01323	New Version Release				Jenny	2024-07-03						



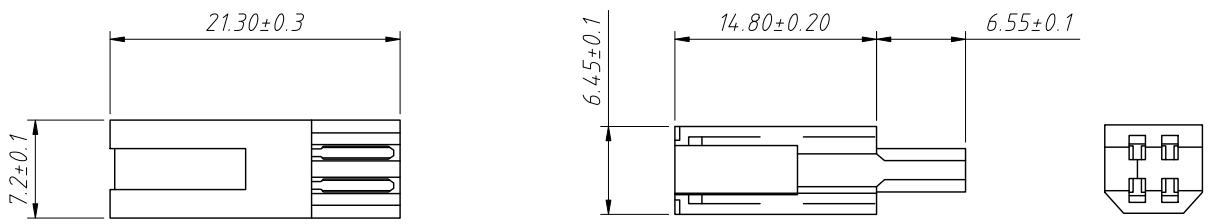


Material:
Housing:Hing PBT,White
Contact:Copper Alloy C2680,Gold in Mating Area;
Tin/Lead On Solder Talls
Shell:SPCC,Tin/Lead Plating

Electrical:
Contact Resistance:30mΩ Max.
Dielectric Withstanding Voltage:50V AC at sea level
Insulation resistance:100MΩ Min

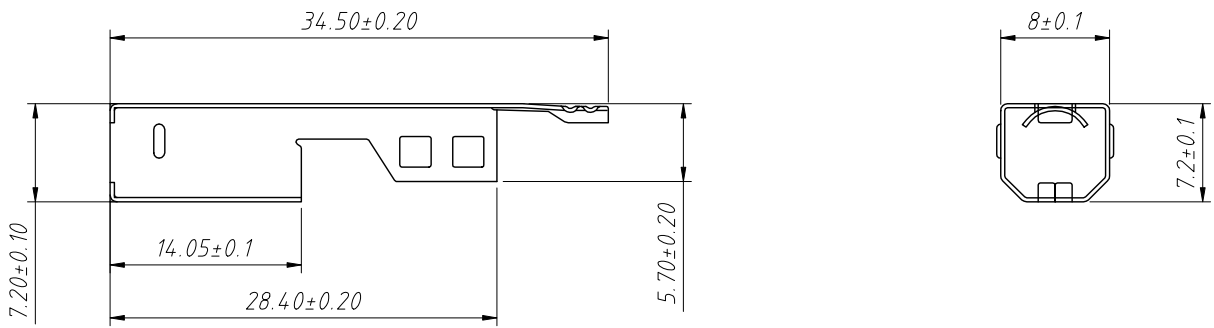

Order Information:
L-KLS1-184A-W
L: RoHS
USB 2.0 Connector
Color:W=White

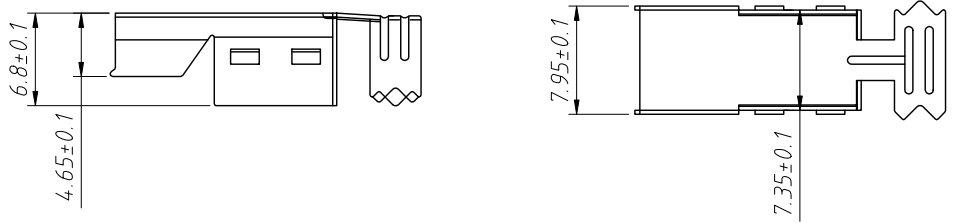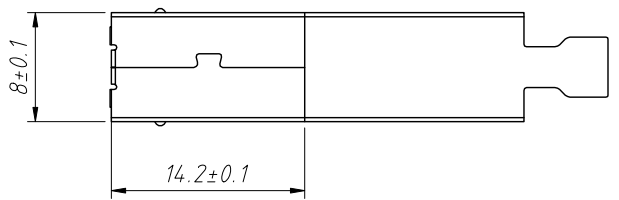

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		USB 2.0 Connector With B Type Male Solder,White	
GENERAL TOLERANCE	UNITS	mm	KLS P/N: L-KLS1-184A-W
x.x ±0.30	SHEET SIZE	A4	NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	Jenny	
x.xxx ±0.10	Check:	Daniel	

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

1 2 3 4 5 6 7 8