

VISIBLE LIGHT PRODUCTS

(Super White Light Emitting Diode)

REV:C

DATE:2000/11/24

ESD Products !


DEVICE NO:HB5-439AW-C/P

匯展工程
90.12.10
發行章

LENS COLOR:

colored diffusion	colored transparent	white diffusion	✓	water clear
-------------------	---------------------	-----------------	---	-------------

PACKAGE DIMENSIONS:

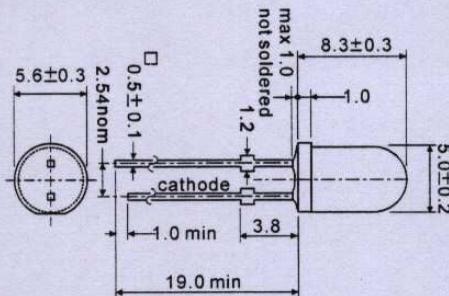

NOTE:

1. All dimensions are in millimeter.
2. Lead spacing is measured where the lead emerge from the package.
3. Protruded resin under flange is 1.5mm max.
4. Specifications are subject to change without notice.
5. Tolerance is 0.3mm unless otherwise noted.

ABSOLUTE MAXIMUM RATINGS:

TA=25°C

PARAMETER	SYMBOL	MAX. RATING	UNIT
Power Dissipation	Pd	120	mW
Continuous Forward Current	IF	30	mA
Peak Forward Current *1	IFM	100	mA
Reverse Voltage	VR	4	V
LED Junction Temperature	Tj	100	°C
Operating Temperature	Topr	-25 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C

Lead Soldering Temperature (1.6mm from case Bottom 260 °C for 5 seconds)

ELECTRIC-OPTICAL CHARACTERISTICS:

TA=25°C

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
View Angle of Half Power	2θ1/2	IF=20mA		50		Degree
Forward Voltage	VF	IF=20mA		3.6	4.0	V
Reverse Current	IR	VR=4V			60	uA
Luminous Intensity *2	IV	IF=20mA	2500	6000		mcd
Chromaticity Coordinates	x	IF=20mA		0.31		
	y	IF=20mA		0.32		
Dominate Wave Length *3	λd(HUE)	IF=20mA		---		nm
Spectrum Width of Half Valve	Δλ	IF=20mA		---		nm

*1.Duty Ratio=1/10,Pulse Width=0.1ms.

*2.Tolerance:30% HUEY-JANN measuring equipment :EXELTRON 2001.

*3.The dominate wavelength .. is derived from the CIE Chromaticity Diagram and represents the color of the device. 管制文件
禁止複製

HUEY JANN ELECTRONICS INDUSTRY CO., LTD.