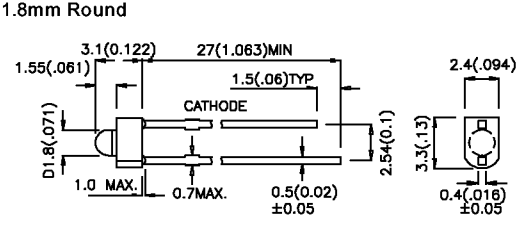
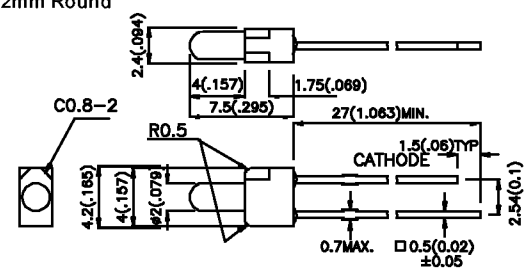


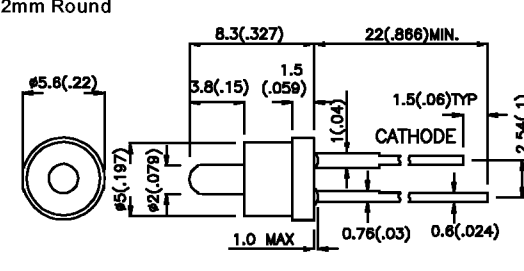
ROUND LED LAMPS

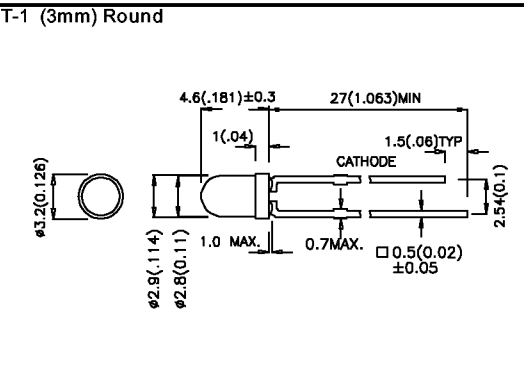
Kingbright®

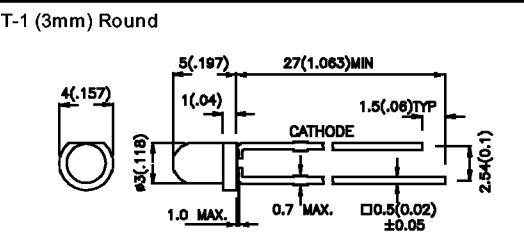
L-1060	L-1464	L-21	L-934	L-34
--------	--------	------	-------	------

Part No.	Emitting Color + Material	Wave-length (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2 ϕ 1/2	Dimension
				Min.	Max.		
L-1060HD	GaP	700	red diffused	0.5	3.2	70°	 <p>1.8mm Round</p>
L-1060ID	GaAsP/GaP	625	red diffused	8	32	70°	
L-1060ED	GaAsP/GaP	625	orange diffused	8	32	70°	
L-1060GD	GaP	565	green diffused	5	20	70°	
L-1060YD	GaAsP/GaP	590	yellow diffused	3.2	20	70°	
L-1060SRD	GaAlAs	660	red diffused	*70	*300	70°	
L-1060SRC	GaAlAs	660	water clear	*100	*500	30°	

L-1464HD	GaP	700	red diffused	0.5	1.25	60°	 <p>2mm Round</p>
L-1464ID	GaAsP/GaP	625	red diffused	5	20	60°	
L-1464ED	GaAsP/GaP	625	orange diffused	5	20	60°	
L-1464GD	GaP	565	green diffused	3.2	12.5	60°	
L-1464YD	GaAsP/GaP	590	yellow diffused	3.2	8	60°	

L-21HD	GaP	700	red diffused	0.5	0.8	60°	 <p>2mm Round</p>
L-21ID	GaAsP/GaP	625	red diffused	3.2	8	60°	
L-21ED	GaAsP/GaP	625	orange diffused	3.2	8	60°	
L-21GD	GaP	565	green diffused	1.25	5	60°	
L-21YD	GaAsP/GaP	590	yellow diffused	1.25	5	60°	
L-21SGD	GaP	565	green diffused	*5	*8	60°	

L-934HD	GaP	700	red diffused	1.3	5	60°	 <p>T-1 (3mm) Round</p>
L-934ID	GaAsP/GaP	625	red diffused	8	50	60°	
L-934IT	GaAsP/GaP	625	red transparent	20	125	50°	
L-934EC	GaAsP/GaP	625	water clear	20	125	50°	
L-934ED	GaAsP/GaP	625	orange diffused	8	50	60°	
L-934GD	GaP	565	green diffused	8	32	60°	
L-934GT	GaP	565	green transparent	20	80	50°	
L-934GC	GaP	565	water clear	20	80	50°	
L-934YD	GaAsP/GaP	590	yellow diffused	8	32	60°	
L-934YT	GaAsP/GaP	590	yellow transparent	10	50	50°	
L-934YC	GaAsP/GaP	590	water clear	10	50	50°	
L-934ND	GaAsP/GaP	610	orange diffused	8	50	60°	
L-934NT	GaAsP/GaP	610	orange transparent	20	125	50°	
L-934NC	GaAsP/GaP	610	water clear	20	125	50°	
L-934PGD	GaP	555	green diffused	2	8	60°	
L-934PGT	GaP	555	green transparent	3.2	20	50°	
L-934PGC	GaP	555	water clear	3.2	20	50°	

L-34HD	GaP	700	red diffused	1.3	3.2	60°	 <p>T-1 (3mm) Round</p>
L-34ID	GaAsP/GaP	625	red diffused	8	50	60°	
L-34GD	GaP	565	green diffused	5	32	60°	
L-34YD	GaAsP/GaP	590	yellow diffused	5	20	60°	
L-34AD	GaAsP/GaP	590	amber diffused	5	20	60°	

NOTES :

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.