




SPECIFICATION:
 1. RATING : DC 30V 0.3A
 2. CONTACT RESISTANCE : 30mΩ Max.
 3. INSULATOR RESISTANCE: 100MΩ Min at DC 500V for 1 Minute.
 4. WITHSTANDING VOLTAGE: AC 500V (50Hz or 60Hz) for 1 Minute.

PIN	$\phi 2.0$	$\phi 2.5$
APPD	C	D

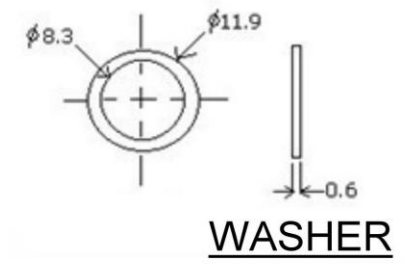

PC.B LAYOUT TOP MEW



4	AXIS SUPPORT	BRASS	1	Ni -Plating
3	PIN	BRASS	1	Ni -Plating
2	TERMINAL	BRASS	3	Ag -Plating
1	HOUSING	PBT	1	BLACK
NO.	DESCRIPTION	MATERAL	QTY.	PLATING

RoHS Compliant			
APPD. 標準 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 0 ±0.1 .00 ±0.05 ANG. ±	PART NAME 品名 DC POWER JACK DIP TYPE $\phi 2.0\text{mm}$ or $\phi 2.5\text{mm}$ NORMAL CLOSE SLIVER PLATING WITH THREAD BLACK INSULATOR WASSY.(NUT+WASHER) ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 PC-G2.5-PCB
DATE 制表日 2011/11/29	PAGE 張數 1 OF 1	REV. 版次 B	